


## **BELLOW CUPS FOR GLASS WITH SUPPORT**

This range of cups has been designed for gripping vertically stocked glass sheets.


By laying the cup on the glass surface and opening the vacuum, the sheet will place itself orthogonally to the floor perfectly adhering to the cup internal face. The glass sheet can then be handled in any direction in full safety. Their aluminium aluminium support has a central threaded hole for fastening it to the machine and for the vacuum connection.

The cups can be cold-assembled onto their support with no adhesives.

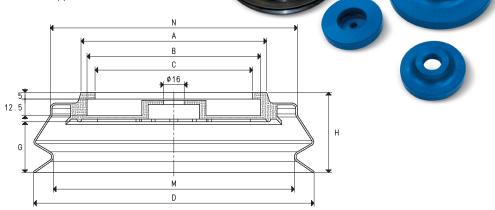


CUPS									
Art.	Force	Α	В	С	D	G	Н	M	N
	Kg	Ø	Ø	Ø	Ø			Ø	Ø
01 150 55 *	45.00	78	70	58	150	33	55	120	125
01 210 60 *	86.50	138	130	118	210	38	61	180	185

<sup>\*</sup> Complete the code indicating the compound: A= oil-resistant rubber; N= natural para rubber; S= silicon



## **SUPPORTS**

Art.	Α	В	С	D	E	Н	Support	Cup	Weight
	Ø	Ø	Ø	Ø			material	art.	g
00 08 280	35	G1/2"		70	12.5	22.5	aluminium	01 150 55	120
00 08 281	65	G1/2"		130	12.5	23.5	aluminium	01 210 60	465
00 08 286	35		8	70	12.5	22.5	aluminium	01 150 55	125
00 08 287	65		8	130	12.5	23.5	aluminium	01 210 60	470



## **CUPS WITH SUPPORT**

Art.	Force	Α	В	С	D	G	Н	Cup	Support	Weight
	Kg	Ø	Ø	Ø	Ø			Art.	Art.	g
08 150 55 *	45.00	78	G1/2"		150	33	60	01 150 55	00 08 280	245
08 210 6 <mark>0 *</mark>	86.50	138	G1/2"		210	38	67	01 210 60	00 08 281	650
08 150 5 <mark>6 *</mark>	45.00	78		8	150	33	60	01 150 55	00 08 286	250
08 210 6 <mark>1 *</mark>	86.50	138	>	8	210	38	67	01 210 60	00 08 287	655

<sup>\*</sup> Compl<mark>ete the c</mark>ode indicating the compound: A= oil-resistant rubber; N= natural para rubber; S= silicon

1.52

drawings available at www.vuototecnica.net

Conversion ratio: inch =  $\frac{\text{mm}}{25.4}$ ; pounds =  $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$ 

GAS - NPT thread adapters available at page 1.117

