




## MINI CUP HOLDERS

The main feature of the cup holders described in these pages is their reduced size, which results in a reduced weight and bulk. They allow using even very small cups, guaranteeing, given the same diameter, the same performance as the larger series.

They are composed of:

- A brass stem for fastening the cup;
- A threaded sleeve equipped with nuts, for mounting the cup holder on the machine;
- A spring to cushion the impact of the cup and to keep, at the same time, a constant pressure with the load to be lifted;
- A quick coupling for connection with the suction hose.

2

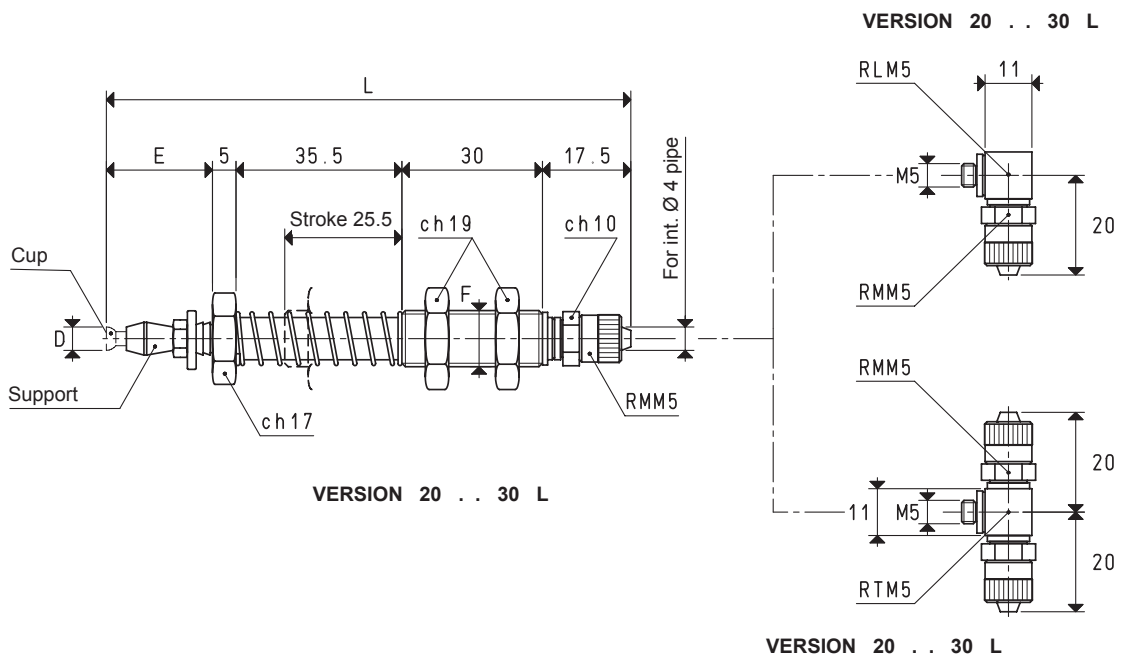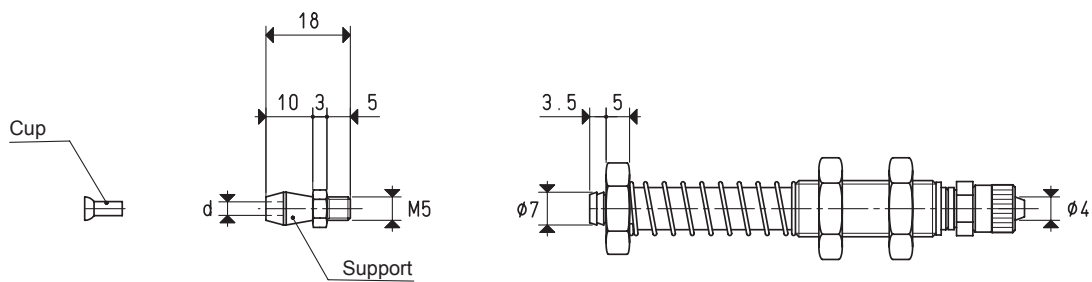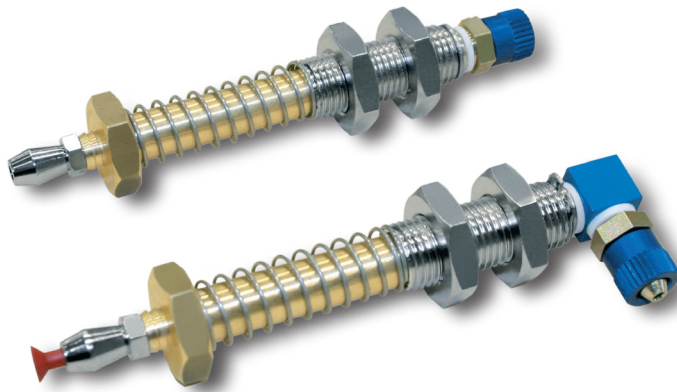

### CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE Ø 4 X 6

Art.	Force Kg	d Ø	D Ø	E	F Ø	L	Cup art.	Support included art.	Weight g
<b>20 04 30</b>	0.03	2.90	4.0	21.0	M12 x 1.25	109.0	01 04 10	00 08 01	74
<b>20 05 30</b>	0.05	2.90	5.0	21.5	M12 x 1.25	109.5	01 05 10	00 08 01	74
<b>20 06 30</b>	0.07	2.90	6.0	21.5	M12 x 1.25	109.5	01 06 10	00 08 01	74
<b>20 08 30</b>	0.12	4.75	8.0	21.5	M12 x 1.25	109.5	01 08 10	00 08 02	74
<b>20 09 30</b>	0.15	4.75	9.0	20.5	M12 x 1.25	108.5	01 09 07	00 08 02	74

**Note:** Cups are not an integral part of the cup holders, therefore, they must be ordered separately.

Add the letter L or T to the code to order cup holders with L or T-type fitting.

Conversion ratio: inch =  $\frac{\text{mm}}{25.4}$ ; pounds =  $\frac{\text{g}}{453.6}$ ;  $\frac{\text{Kg}}{0.4536}$

3D drawings available at [www.vuototecnica.net](http://www.vuototecnica.net)

2.01