



SPECIAL STAINLESS STEEL ANTI-ROTATION CUP HOLDERS

Designed for the robot-automotive sector, these cup holders offer ideal solutions to various handling problems that arise in all industrial sectors. The distinctive features of these cup holders are their brass stem with hexagonal section and the steel drive bush, also with hexagonal hole. This structure prevents the stem and, as a consequence, the cup assembled onto it from rotating on its axis. The drive bush is provided with two fine thread ring nuts to guarantee an accurate fastening of the cup holder to the machine. Moreover, the two ends of the stem, also in stainless steel, are threaded male or female and interchangeable. The straight quick coupler for the connection to the suction hose is screwed to one end, while the cup with support is assembled onto the other end.

They are suited for cups with a diameter between 40 mm and 200 mm, and they are necessary for assembling rectangular and oval cups.

The actual springing stroke is:

- For height C= 55 mm 37 mm
- For height C= 110 mm 84 mm

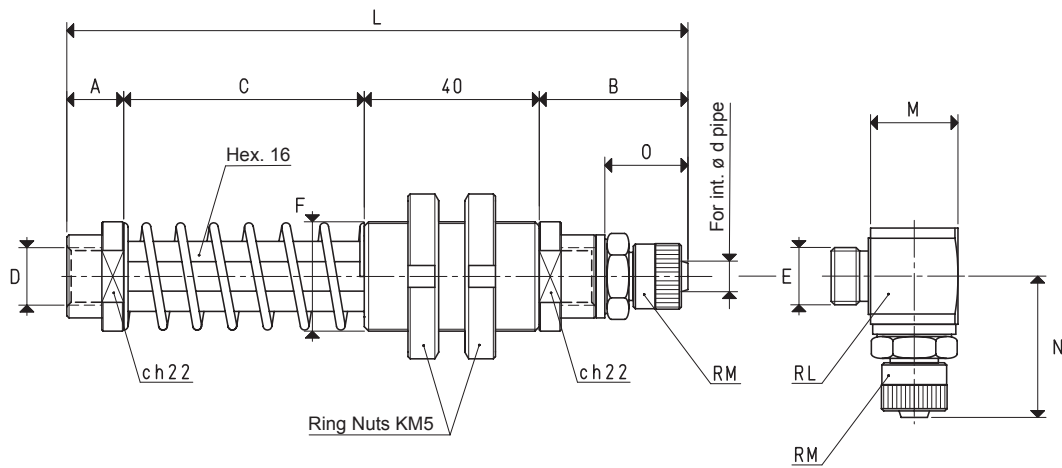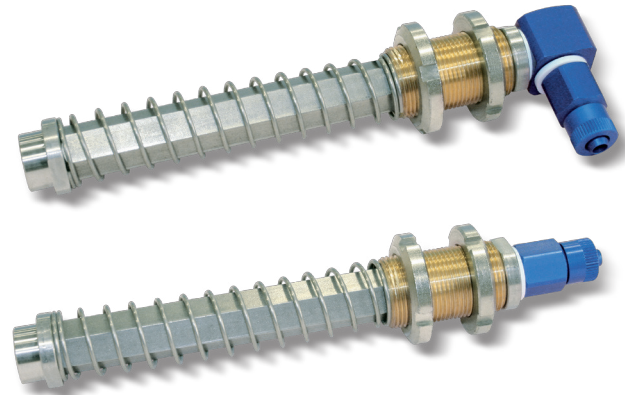

VERSION 06

VERSION 06 L

CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE

Art.	A	B	C	D	d	E	F	L	M	N	O	RL	RM	Weight g
06 55 80	13	34	55	G1/4"	6	G1/4"	M25 x 1.5	142	21.0	32.0	18.5	G1/4"	G1/4"	318
06 55 81	15	40	55	G3/8"	9	G3/8"	M25 x 1.5	150	21.5	35.5	22.0	G3/8"	G3/8"	330
06 55 82	15	34	55	G3/8"	6	G1/4"	M25 x 1.5	144	21.0	32.0	18.5	G1/4"	G1/4"	320
06 110 80	13	34	110	G1/4"	6	G1/4"	M25 x 1.5	197	21.0	32.0	18.5	G1/4"	G1/4"	386
06 110 81	15	40	110	G3/8"	9	G3/8"	M25 x 1.5	205	21.5	35.5	22.0	G3/8"	G3/8"	398
06 110 82	15	34	110	G3/8"	6	G1/4"	M25 x 1.5	199	21.0	32.0	18.5	G1/4"	G1/4"	388


Note: Add the letter L to the code to order L-type fittings.

2.142


Conversion ratio: inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = 0.4536$ Kg

SPECIAL ANTI-ROTATION CUP HOLDERS WITH THREADED MALE CONNECTOR

The actual springing stroke is:
 - For height C= 55 mm 37 mm
 - For height C= 110 mm 84 mm

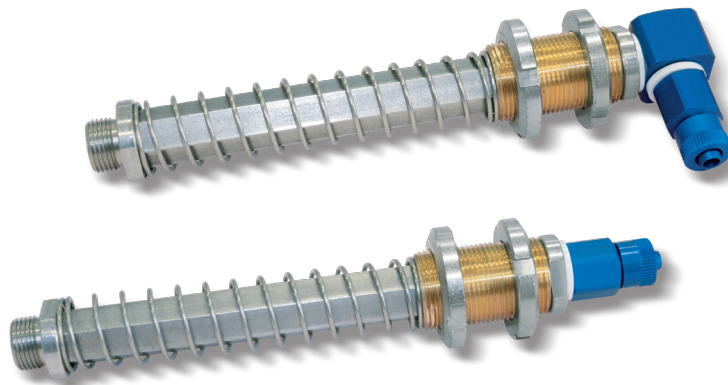

2

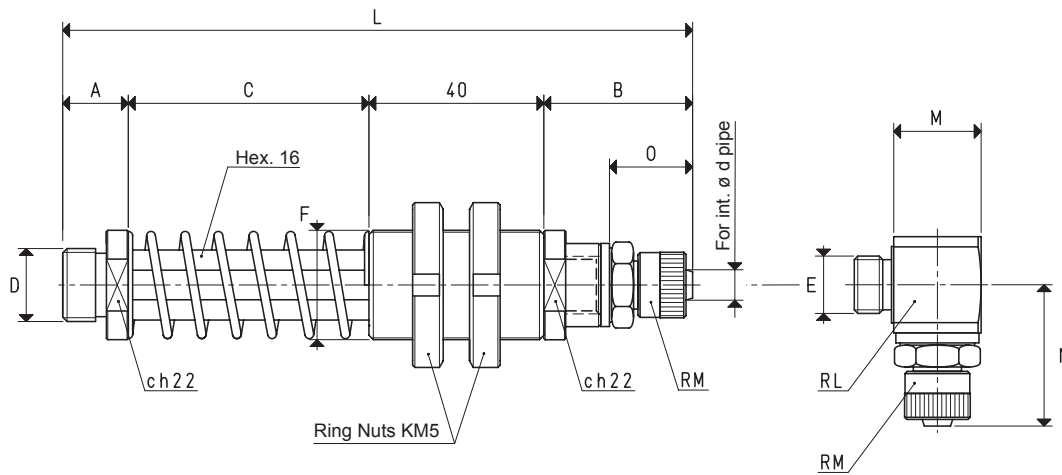

VERSION 06

VERSION 06 L

CUP HOLDERS WITH STRAIGHT QUICK COUPLER FOR PLASTIC HOSE

Art.	A	B	C	D	d	E	F	L	M	N	O	RL	RM	Weight g
				∅	∅	∅	∅							
06 55 90	15	34	55	G1/4"	6	G1/4"	M25 x 1.5	144	21.0	32.0	18.5	G1/4"	G1/4"	314
06 55 91	15	34	55	G3/8"	6	G1/4"	M25 x 1.5	144	21.0	32.0	18.5	G1/4"	G1/4"	320
06 55 92	15	40	55	G3/8"	9	G3/8"	M25 x 1.5	150	21.5	35.5	22.0	G3/8"	G3/8"	330
06 55 93	15	40	55	G1/2"	9	G3/8"	M25 x 1.5	150	21.5	35.5	22.0	G3/8"	G3/8"	332
06 55 94	15	34	55	M12	6	G1/4"	M25 x 1.5	144	21.0	32.0	18.5	G1/4"	G1/4"	318
06 55 95	15	40	55	M12	9	G3/8"	M25 x 1.5	150	21.5	35.5	22.0	G3/8"	G3/8"	328
06 55 96	15	40	55	M16	9	G3/8"	M25 x 1.5	150	21.5	35.5	22.0	G3/8"	G3/8"	330
06 110 90	15	34	110	G1/4"	6	G1/4"	M25 x 1.5	199	21.0	32.0	18.5	G1/4"	G1/4"	374
06 110 91	15	34	110	G3/8"	6	G1/4"	M25 x 1.5	199	21.0	32.0	18.5	G1/4"	G1/4"	380
06 110 92	15	40	110	G3/8"	9	G3/8"	M25 x 1.5	205	21.5	35.5	22.0	G3/8"	G3/8"	390
06 110 93	15	40	110	G1/2"	9	G3/8"	M25 x 1.5	205	21.5	35.5	22.0	G3/8"	G3/8"	392
06 110 94	15	34	110	M12	6	G1/4"	M25 x 1.5	199	21.0	32.0	18.5	G1/4"	G1/4"	378
06 110 95	15	40	110	M12	9	G3/8"	M25 x 1.5	205	21.5	35.5	22.0	G3/8"	G3/8"	388
06 110 96	15	40	110	M16	6	G3/8"	M25 x 1.5	205	21.5	35.5	22.0	G3/8"	G3/8"	390

Note: Add the letter L to the code to order L-type fittings.

Conversion ratio: inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6}$ = $\frac{\text{Kg}}{0.4536}$

2.143

3D drawings available at www.vuototecnica.net